

WELDLOK® ALUMINIUM STAIR TREADS

Weldlok® aluminium stair treads are fabricated from rectangular swaged bar grating. The bar grating is available with a plain or serrated surface.

Aluminium stair treads are available with two types of nosing - floor plate or non-slip yellow abrasive. The treads can be welded into place or supplied with pre-drilled holes for bolting.

Overall tread length can be made to any dimension. However, it is preferable where possible to select tread dimensions from the tables of recommended widths and maximum lengths below.

Stair Tread Types

T3 Floor plate nosing (weld-in)

T4 Floor plate nosing (bolt-in)

T5 Yellow abrasive nosing (weld-in)


T6 Yellow abrasive nosing (bolt-in)



RECOMMENDED WIDTHS (mm)								
TYPE T3/T4	SERIES 30	125	155	185	215	245	275	305
	SERIES 60		155		215		275	
TYPE T5/T6	SERIES 30	125	155	185	215	245	275	305
	SERIES 60			185		245		305
BOLTED CONNECTIONS								
END PLATE HOLE CENTRES "A"	45	75	75	100	100	100	100	

RECOMMENDED MAX. LENGTHS (mm)			
LOAD BAR SIZE	25 x 5	32 x 5	40 x 5
SERIES 30	550	900	1275
SERIES 60		450	700

Standard End Plates for Bolted Treads

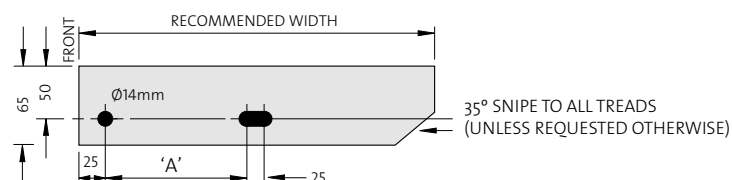

Note: Special End Plate Hole Centres available on request.

BRANCHES

NEW SOUTH WALES

117-153 Rookwood Road
Yagoona NSW 2199

P: + 61 2 9707 5000
E: info@weldlok.com.au

VICTORIA

171 Derrimut Drive
Derrimut VIC 3026

P: + 61 3 8353 3701
E: vic.bi@nepean.com

QUEENSLAND

14 Griffin Crescent
Brendale QLD 4500

P: + 61 7 3633 1333
E: qld.bi@nepean.com

WESTERN AUSTRALIA & NORTHERN TERRITORY

98 Campbell Street
Belmont WA 6104

P: + 61 8 9478 1034
E: wa.bi@nepean.com

Visit us Online

weldlok.com.au

Freecall

1800 WELDLOK